



ADDENDA NO. 01

to

RFB 54-1617 - Roofing at Millikan and Wilson High Schools

Issued: June 12, 2017

NOTICE TO ALL PROSPECTIVE BIDDERS:

This Addendum and any attachments are hereby incorporated and made part of the above referenced Bid. All information contained in the original terms, conditions, and specifications shall be included in the contract, except as modified herein.

This Addendum shall amend the Bid as follows:

Item No. 1:

Page 71, C. (Site Specifications):

Revise the material quantity list as follows:

<u>Material</u>	<u>Amount</u>	<u>Unit Size</u>
HPR Torch Base Sheet	84	Roll
Stressply IV Mineral	20	Roll
Stressply IV UV Mineral	100	Roll
HPR SA FR Base Sheet	8	Roll
HPR Aquashield -- Green Felt	0	Roll
White Star	0	5 Gal
Pyramic	0	5 Gal
Flashing Bond	30	5 Gal
Tuff Stuff Caulking	0	Tube
Garla Prime VOC	68	5 Gal
Energizer Lo	0	5 Gal
White Knight Metal Primer	0	5 Gal
White Knight Plus WC	0	5 Gal
Black Knight Primer	0	5 Gal
Weatherscreen	635	5 Gal
RMER SS Flat Stock	0	4' x 10'

Item No. 2:

Page 73, D. (Asbestos Survey Report):

Add the following:


1. All available environmental survey reports can be downloaded via the following link:
<https://www.dropbox.com/sh/acl2dgabtykb22k/AADyqrArxqCFIyHkM0jW7TiDa?dl=0>

Item No. 3:

Page 75, 1.1., B (Technical Specifications):

Replace with the map below:

Millikan High School 200 & 400 (2 Sections)

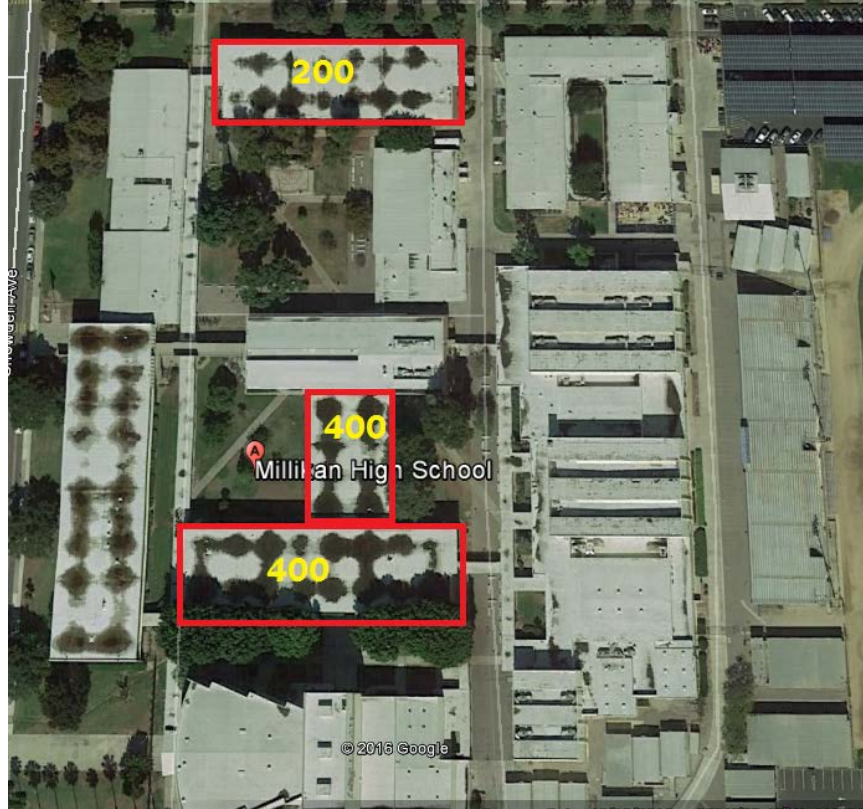

Item No. 4:

Page 75, 1.1., C.1. (Technical Specifications):

Remove: "Remove existing OSB deck."

Replace with: "Contractor to repair damaged structural decking as required. "

Item No. 5:

Page 76, 1.1., C.7. (Technical Specifications):

Add the following:

- On all parapet walls, material is to be terminated at 2' with a termination bar set in butyl tape and fastened every 6" o.c. Caulk above the termination bar. Install 22 gauge, reglet mounted counterflashing - **RMER SS Flat Stock**. Walls to receive coping cap metal with wood nailer as required and specified.

Item No. 6:

Page 77, 1.1., D.4. (Technical Specifications):

Add the following:

- At Millikan High, apply different primer - **Garla Prime VOC** -- at ½ gal per sq. Allow primer to cure for 6 hrs.

Item No. 7:

Page 77, 1.1., D.5. (Technical Specifications):

Add the following:

- At Millikan High, apply different flood coating - **Weatherscreen** -- at 5gal per sq. Embed into the coating 400 lbs. per sq. of Title 24 white gravel.

Item No. 8:

Page 81, 2.1., I (Technical Specifications):

Revise the material quantity list as follows:

<u>Material</u>	<u>Amount</u>	<u>Unit Size</u>
HPR Torch Base Sheet	84	Roll
Stressply IV Mineral	20	Roll
Stressply IV UV Mineral	100	Roll
HPR SA FR Base Sheet	8	Roll
HPR Aquashield -- Green Felt	0	Roll
White Star	0	5 Gal
Pyramic	0	5 Gal
Flashing Bond	30	5 Gal
Tuff Stuff Caulking	0	Tube
Garla Prime VOC	68	5 Gal
Energizer Lo	0	5 Gal
White Knight Metal Primer	0	5 Gal
White Knight Plus WC	0	5 Gal
Black Knight Primer	0	5 Gal
Weatherscreen	635	5 Gal
RMER SS Flat Stock	0	4' x 10'

Please amend your bid package to reflect the above additions, changes, revisions, and/or clarifications. Acknowledge the inclusion of all addenda issued on the blanks provided on your Bid Form. Your failure to do so may render your bid non-responsive.

ISSUED BY:



RFB Contact